
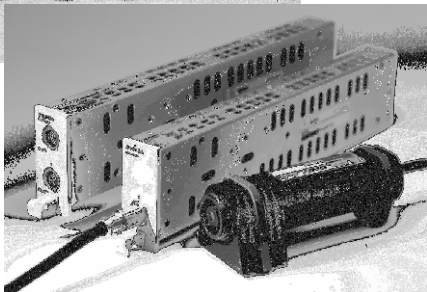


Agilent Power Sensor Modules Agilent Optical Heads Agilent Return Loss Modules

Technical Specifications
February 2006

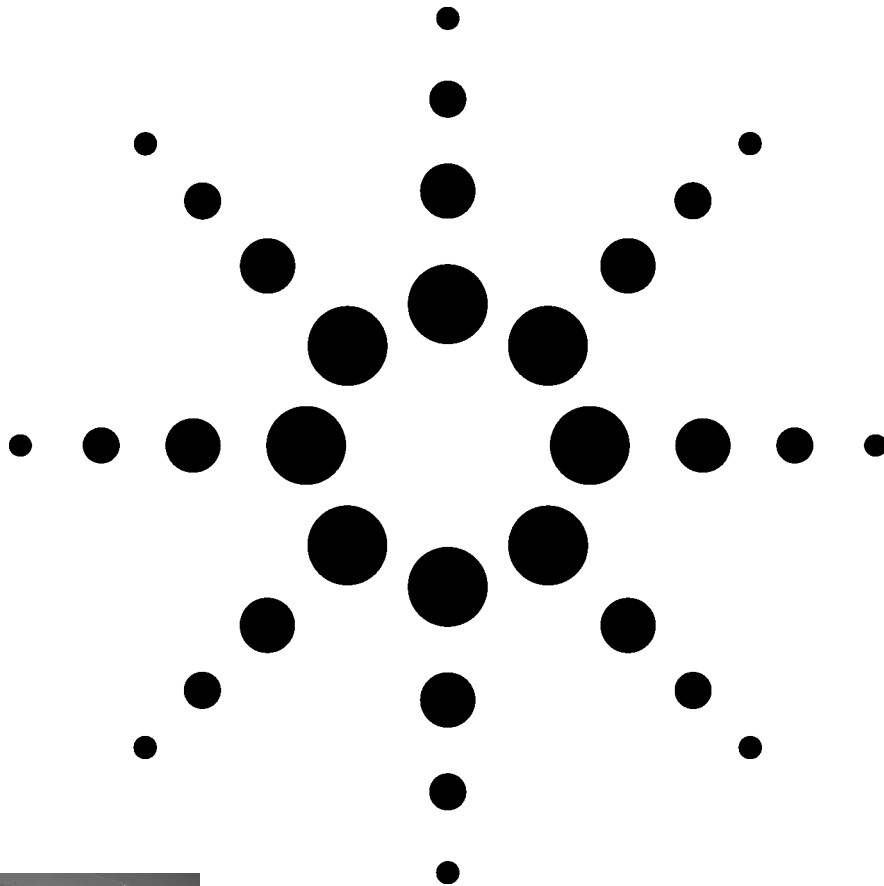

Agilent Technologies

Specification: describes a guaranteed product performance that is valid under the specified conditions. Specifications are based on a coverage factor of 2 (unless otherwise stated), corresponding to a level of confidence of >95%.

Typical value: a characteristic, describes the product performance that is usually met but not guaranteed.

Generally, specifications are valid after warm-up, after zeroing, in auto-range mode (if not differently stated) and at the stated operating conditions and measurement settings.

Power sensor module specifications

	Agilent 81635A	Agilent 81634B
Sensor element	InGaAs (dual)	InGaAs
Wavelength range	800 nm to 1650 nm	800 nm to 1700 nm
Power range	-80 dBm to +10 dBm	-110 dBm to +10 dBm
Applicable fiber type	Standard SM and MM up to 62.5 μm core size, NA ≤ 0.24	Standard SM and MM up to 100 μm core size, NA ≤ 0.3
Uncertainty (accuracy) at reference conditions ^[1]	typ. < ± 3,5 % ^[10] (800 nm to 1200 nm) ± 3 % (1200 nm to 1630 nm)	± 2,5 % (1000 nm to 1630 nm)
Total uncertainty ^[2]	typ. ± 5,5% ± 200 pW ^{[9][11]} (800 nm to 1200 nm) ± 5% ± 20 pW ^{[8],[9]} (1200 nm to 1630 nm)	± 4,5% ± 0,5 pW (1000 nm to 1630 nm)
Relative uncertainty: - due to polarization ^[3] - spectral ripple (due to interference) ^[4]	typ. < ± 0,015 dB typ. < ± 0,015 dB	< ± 0,005 dB < ± 0,005 dB
Linearity (power): ^[5] - at 23°C ± 5°C - at operating temp. range	CW -60 dBm to +10 dBm typ. < ± 0,02 dB ^[9] (800 nm to 1200 nm) < ± 0,02 dB ^[9] (1200 nm to 1630 nm) typ. < ± 0,06 dB ^[9] (800 nm to 1200 nm) < ± 0,06 dB ^[9] (1200 nm to 1630 nm)	CW -90 dBm to +10 dBm < ± 0,015 dB (1000 nm to 1630 nm) < ± 0,05 dB (1000 nm to 1630 nm)
Return loss ^[7]	> 40 dB	> 55 dB
Noise (peak to peak) ^[6]	typ. < 200 pW (800 nm to 1200 nm) < 20 pW (1200 nm to 1630 nm)	< 0,2 pW (1200 nm to 1630 nm)
Averaging time (minimal)	100 μs	100 μs
Analog Output	None	included
Dimensions (H x W x D)	75 mm x 32 mm x 335 mm (2.8" x 1.3" x 13.2")	75mm x 32mm x 335mm (2.8" x 1.3" x 13.2")
Weight	0,5 kg	0,5 kg
Recommended recalibration period	2 years	2 years
Operating temperature	+10°C to +40°C	0°C to +45°C
Humidity	Non-condensing	Non-condensing
Warm-up time	20 min	20 min

^[1] Reference Conditions:

- Power level 10 μW (-20 dBm), continuous wave (CW)
- Fiber 50 μm graded-index, NA=0.2
- Ambient temperature 23°C ± 5°C
- On day of calibration (add ± 0.3 % for aging over one year, add ± 0.6 % over two years)
- Spectral width of source < 10nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[2] Operating Conditions:

- Fiber ≤ 50 μm, NA ≤ 0.2
- Averaging time 1s
- Only Agilent 81635A: For fiber 62.5 μm graded-index (NA=0.24): add ± 2 %
- Within one year after calibration, add 0.3 % for second year

- Add ± 1% for Biconic connector
- Operating temperature range as specified humidity: none condensing

^[3] All states of polarization at constant wavelength (1550 nm ± 30 nm) and constant power, straight connector, T = 23°C ± 5°. For angled connector (8°) add ± 0.01 dB typ.

^[4] Conditions:

- Wavelength 1550 nm ± 30 nm, fixed state of polarization, constant power
- Temperature 23°C ± 5°C
- Linewidth of source 100 MHz,
- Angled connector 8°.

^[5] Does not include noise

^[6] Averaging time 1s, T = 23°C ± 5°C, ΔT ± 1°C, observation time 300 s.

^[7] Conditions:

- Wavelengths 1310nm ± 30 nm and 1550nm ± 30 nm
- Standard single mode fiber, angled connector min 8°
- T = 23°C ± 5°C

^[8] For wavelengths > 1600 nm add ± 0.06%/nm.

^[9] For input power > 2 mW add ± 0.02 dB.

^[10] add ± 1% for wavelength 900 nm to 950 nm.

^[11] add ± 3.5% for wavelength 900 nm to 950 nm.

High power sensor module specifications

	Agilent 81630B
Sensor element	InGaAs
Wavelength range	970 nm to 1650 nm
Power range	-70 dBm to +28 dBm
Applicable fiber type	Standard SM and MM up to 100 μm core size, NA ≤ 0.3
Uncertainty (accuracy) at reference conditions ^[1]	± 3.0 % for 1255 nm to 1630 nm at 980 nm ± 3.5 % (add ± 0.5% per nm if 980 nm is not the center wavelength) at 1060 nm ± 4.0 % (add ± 0.6% per nm if 1060 nm is not the center wavelength),
Total uncertainty ^{[2][8]}	± 5 % ± 1.2 nW (1255 nm to 1630 nm) at 980 nm ± 5.5 % ± 1.2 nW (add ± 0.5% per nm if 980 nm is not the center wavelength) at 1060 nm ± 6.0 % ± 1.2 nW (add ± 0.6 % per nm if 1060 nm is not the center wavelength)
Relative uncertainty: - due to polarization ^[3] - spectral ripple (due to interference) ^[4]	< ± 0.01 dB < ± 0.005 dB
Linearity (power): ^[5] - at 23°C ± 5°C - at operating temp. range	CW – 50 dBm to + 28 dBm (970 nm – 1630 nm) ≤ ± 0.05 dB ^[8] ≤ ± 0.15 dB ^[8]
Return loss ^[7]	> 55 dB
Noise (peak to peak) ^[6]	< 1.2 nW (1255 nm – 1630 nm)
Averaging time (minimal)	100 μs
Analog Output	Included
Dimensions (H x W x D)	75 mm x 32 mm x 335 mm (2.8" x 1.3" x 13.2")
Weight	0.6 kg
Recommended recalibration period	2 years
Operating temperature	0°C to +35°C
Humidity	Non-condensing
Warm-up time	20 min

^[1] Reference Conditions:

- Power level 80 μW, continuous wave (CW)
- SM Fiber; 9 μm; NA = 0.1
- Ambient temperature 23°C ± 5°C
On day of calibration (add ± 0.3 % for aging over one year, add ± 0.6 % over two years)
- Spectral width of source < 10 nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[2] Operating Conditions:

- Fiber ≤ 50 μm, NA ≤ 0.2
- Averaging time 1s
- Within one year after calibration, add 0.3 % for second year
- Add ± 1% for Biconic connector
- Operating temperature range as specified, humidity: non-condensing

^[3] All states of polarization at constant wavelength

- (1550 nm ± 30 nm) and constant power, straight connector, T = 23°C ± 5°.
- For angled connector (8°) add ± 0.01 dB typ.

^[4] Conditions:

- Wavelength 1550 nm ± 30 nm, fixed state of polarization, constant power, Temperature 23°C ± 5°C
- Linewidth of source ≥ 100 MHz
- Angled connector 8°

^[5] Does not include noise

- Averaging time 1s, T = 23°C ± 5°C, ΔT ± 1°C, observation time 300 s.

^[7] Conditions:

- Wavelengths 1310nm ± 30 nm and 1550nm ± 30 nm
- Standard single mode fiber
- Angled connector min 8°
- T = 23°C ± 5°C

^[8] For input power > +10 mW add:

- typ. ± 0.0012 dB/mW
- In case of negative power change > 50dB allow additional recovery time of 3 min

^[9] 30°C for > +20 dBm input power

Fast power sensor module specifications

	Agilent 81636B
Sensor element	InGaAs
Wavelength range	1250 nm to 1640 nm
Power range	-80 dBm to +10 dBm
Applicable fiber type	Standard SM and MM up to 62.5 μm core size, NA ≤ 0.24
Uncertainty (accuracy) at reference conditions ^[1]	± 3 % (1260 nm to 1630 nm)
Total uncertainty ^{[2],[9]}	± 5% ± 20 pW ^[8] (1260 nm to 1630 nm)
Relative uncertainty:	
- due to polarization ^[3]	typ. ± 0.015 dB
- spectral ripple (due to interference) ^[4]	typ. ± 0.015 dB
Linearity (power) ^{[5],[9]}	CW -60 to +10 dBm, (1260 nm to 1630 nm)
- at 23°C ± 5°C	< ± 0.02 dB
- at operating temperature range	< ± 0.06 dB
Return loss ^[7]	>40 dB
Noise (peak to peak) ^[6]	< 20 pW (1260 nm – 1630nm)
Averaging time (minimal)	25 μs
Dynamic Range at manual range mode ^{[5],[10]}	
- at +10dBm-range	typ. >55dB
- at ± 0dBm-range	typ. >55dB
- at -10dBm-range	typ. >52dB
- at -20dBm-range	typ. >45dB
Noise at manual range mode (peak to peak): ^[10]	CW -60 to +10 dBm, 1260 nm to 1630 nm
- at +10dBm-range	< 50 nW
- at ± 0dBm-range	< 5 nW
- at -10dBm-range	< 1 nW
- at -20dBm-range	< 500 pW
Analog Output	Included
Dimensions (H x W x D)	75 mm x 32 mm x 335 mm (2.8" x 1.3" x 13.2")
Weight	0.5 kg
Recommended recalibration period	2 years
Operating temperature	+10°C to +40°C
Humidity	Non-condensing
Warm-up time	20 min

^[1] Reference Conditions:

- Power level 10 μW (-20 dBm), continuous wave (CW)
- Fiber 50 μm graded-index, NA=0.2
- Ambient temperature 23°C ± 5°C
- On day of calibration (add ± 0.3 % for aging over one year, add ± 0.6 % over two years)
- Spectral width of source < 10nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[2] Operating Conditions:

- Fiber ≤ 50 μm, NA ≤ 0.2
- Averaging time 1s
- Within one year after calibration, add 0.3 % for second year
- Add ± 1% for Biconic connector
- Operating temperature range as specified
- Humidity: non-condensing

^[3] All states of polarization at constant

wavelength (1550 nm ± 30 nm) and constant power, straight connector, T = 23°C ± 5°. For angled connector (8°) add ± 0.01 dB typ.

^[4] Conditions:

- Wavelength 1550 nm ± 30 nm, fixed state of polarization, constant power
- Temperature 23°C ± 5°C
- Linewidth of source ≥ 100 MHz
- Angled connector 8°

^[5] Does not include noise

^[6] Averaging time 1s, T = 23°C ± 5°C, ΔT ± 1°C, observation time 300 s.

^[7] Conditions:

- Wavelengths 1310nm ± 30 nm and 1550nm ± 30 nm
- Standard single mode fiber
- Angled connector min 8°. T = 23°C ± 5°C

^[8] For wavelengths >1600 nm add ± 0.06%/nm

^[9] For input power >2 mW add ± 0.02 dB

^[10] Conditions:

Averaging time 25μs, T = 23°C ± 5, Observation time 2.5 s

Optical head specifications

All optical heads have to be operated with the single (Agilent 81618A) or dual (Agilent 81619A) Interface Modules.

	Agilent 81623B	Agilent 81623B Calibration option C85 / C86	Agilent 81623B Calibration option C01 / C02
Sensor element	Ge, \varnothing 5 mm		
Wavelength range	750 nm to 1800 nm		
Power range	-80 dBm to +10 dBm		
Applicable fiber type	Standard SM and MM max 100 μ m core size, NA \leq 0.3		
Open beam	Parallel beam max \varnothing 4 mm		
Uncertainty at reference conditions ^[1]	$\pm 2.2\%$ (1000 nm to 1650 nm) $\pm 3.0\%$ (800 nm to 1000 nm)	$\pm 2.2\%$ (1000 nm to 1650 nm) $\pm 2.5\%$ (800 nm to 1000 nm)	$\pm 1.7\%$ (1000 nm to 1650 nm) $\pm 3.0\%$ (800 nm to 1000 nm)
Total uncertainty ^{[2],[9]}	$\pm 3.5\% \pm 100$ pW (1000 nm to 1650 nm) $\pm 4.0\% \pm 250$ pW (800 nm to 1000 nm)	$\pm 3.5\% \pm 100$ pW (1000 nm to 1650 nm) $\pm 3.5\% \pm 250$ pW (800 nm to 1000 nm)	$\pm 3.0\% \pm 00$ pW (1000 nm to 1650 nm) $\pm 4.0\% \pm 50$ pW (800 nm to 1000 nm)
Relative uncertainty: - due to polarization ^[3] - spectral ripple (due to interference) ^[4]	$< \pm 0.01$ dB ^[10] (typ. $< \pm 0.005$ dB) $< \pm 0.006$ dB (typ. $< \pm 0.003$ dB)		
Linearity (power): ^[5] at 23°C \pm 5°C at operating temp. range	(CW -60 dBm to +10 dBm) ^[9] $< \pm 0.025$ dB $< \pm 0.05$ dB		
Return loss ^[7]	> 50 dB, typ. > 55 dB ^[8]		> 56 dB
Noise (peak to peak) ^[6]	< 100 pW (1200 nm to 1630 nm) < 400 pW (800 nm to 1200 nm)		
Averaging time (minimal)	100 μ s		
Analog Output	included		
Dimensions	57 mm x 66 mm x 156 mm		
Weight	0.5 kg		
Recommended recalibration period	2 years		
Operating temperature	0°C to 40°C		
Humidity	Non-condensing		
Warm-up time	40 min		

^[1] Reference conditions:

- Power level 10 μ W (-20 dBm), continuous wave (CW)
- Parallel beam, 3 mm spot diameter on the center of the detector
- Ambient temperature 23°C \pm 5°C
- On day of calibration (add $\pm 0.3\%$ for aging over one year, add $\pm 0.6\%$ over two years)
- Spectral width of source < 10 nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[2] Operating Conditions:

- Parallel beam, 3mm spot diameter on the center of the detector or connectorized fiber with NA ≤ 0.2 (straight connector)
- Averaging time 1s
- For NA > 0.2 : add 1%
- Within one year after calibration, add 0.3 % for second year
- Spectral width of source < 10 nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[3] All states of polarization at constant wavelength (1550 nm \pm 30 nm) and straight connector, T = 23°C \pm 5°C.
For angled connector (8°) add 0.01 dB typ.

^[4] Conditions:

- Wavelength 1550 nm \pm 30 nm, fixed state of polarization
- Temperature 23°C \pm 5°C
- Linewidth of source ≥ 100 MHz
- Angled connector 8°

^[5] Does not include noise; for wavelength < 1000 nm applies for -50 dBm to +10 dBm

^[6] Averaging time 1 s, T = 23°C \pm 5°C, Δ T \pm 1°C, observation time 300 s.

^[7] Conditions:

Wavelengths 1550nm \pm 30 nm.
Standard single mode fiber, angled connector min 8°

^[8] With D-shape adapter 81001xx
Return Loss: > 60 dB typical

^[9] For input power > 2 mW
add ± 0.004 dB / mW;
zeroing required

^[10] Specification valid for optical heads with S/N starting with "DE413..." (shipping began April 1, 2001)

High power optical head specifications

All optical heads have to be operated with the single (Agilent 81618A) or dual (Agilent 81619A) Interface Modules

	Agilent 81624B	Agilent 81624B Calibration option C01 / C02	Agilent 81626B	Agilent 81626B Calibration option C01 / C02
Sensor element	InGaAs, \varnothing 5 mm		InGaAs, \varnothing 5mm	
Wavelength range	800 nm to 1700 nm		850 nm to 1650nm	
Power range	-90 dBm to +10 dBm		-70 to +27 dBm (1250 nm to 1650 nm) -70 to +23 dBm (850 nm to 1650 nm)	
Applicable fiber type	Standard SM and MM max 100 μ m core size, NA \leq 0.3		Standard SM and MM max 100 μ m core size, NA \leq 0.3	
Open beam	Parallel beam max \varnothing 4 mm		Parallel beam max \varnothing 4 mm	
Uncertainty at reference conditions ^[1]	$\pm 2.2\%$ (1000nm to 1630 nm)	$\pm 1.5\%$ (970 nm to 1630 nm)	$\pm 3.0\%$ (950 nm to 1630 nm)	$\pm 2.5\%$ (950 nm to 1630 nm)
Total uncertainty ^[2]	$\pm 3.5\% \pm 5$ pW (1000nm to 1630 nm)	$\pm 2.8\% \pm 5$ pW (970 nm to 1630 nm)	$\pm 5.0\% \pm 500$ pW ^[8] (950 nm to 1630 nm)	$\pm 4.5\% \pm 500$ pW ^[8] (950 to 1630 nm max 23 dBm) (1250 to 1630 nm max 27 dBm)
Relative uncertainty: ^[7] - due to polarization ^[3] - spectral ripple (due to interference) ^[4]	$\leq \pm 0.005$ dB (typ. ± 0.002 dB) $\leq \pm 0.005$ dB (typ. $< \pm 0.002$ dB)		$\leq \pm 0.005$ dB (typ. ± 0.002 dB) $\leq \pm 0.005$ dB (typ. $< \pm 0.002$ dB)	
Linearity (power): ^[5] - at 23°C ± 5 °C - at operat. temp. range	CW -70 dBm to +10 dBm, 1000 nm to 1630 nm $< \pm 0.02$ dB $< \pm 0.05$ dB		CW -50 dBm to + 27dBm, 950 nm to 1630 nm $< \pm 0.04$ dB ^[8] $< \pm 0.15$ dB ^[8]	
Return loss ^[7]	typ. 60 dB		> 45 dB	> 47 dB
Noise (peak to peak) ^[6]	< 5 pW		< 500 pW	
Averaging time (min.)	100 μ s		100 μ s	
Analog Output	included		Included	
Dimensions	57 mm x 66 mm x 156 mm		57 mm x 66 mm x 156 mm	
Weight	0.5 kg		0.5 kg	
Recommended recalibration period	2 years		2 years	
Operating temperature	0°C to 40°C		0°C to +35°C ^[9]	
Humidity	Non-condensing		Non-condensing	
Warm-up time	40 min		40 min	

^[1] Reference conditions:

- Power level 10 μ W (-20 dBm), continuous wave (CW)
- Parallel beam, 3 mm spot diameter on the center of the detector
- Ambient temperature 23°C \pm 5°C
- On day of calibration (add $\pm 0.3\%$ foraging over one year, add $\pm 0.6\%$ over two years)
- Spectral width of source < 10 nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm

^[2] Operating Conditions:

- Parallel beam, 3mm spot diameter on the center of the detector or connectorized fiber with NA ≤ 0.2 (straight connector)
- Averaging time 1s
- For NA > 0.2 : add 1%.
- Within one year after calibration, add 0.3 % for second year.
- Zeroing required

^[3] All states of polarization at constant wavelength (1550 nm \pm 30 nm), straight connector, T = 23°C \pm 5°C. For angled connector (8°) add 0.01 dB typ.

^[4] Conditions:

- Wavelength 1550 nm \pm 30 nm, fixed state of polarization
- Temperature 23°C \pm 5°C
- Linewidth of source ≥ 100 MHz
- Angled connector 8°

^[5] Does not include noise; zeroing required

^[6] Averaging time 1s, T = 23°C \pm 5°C, $\Delta T \pm 1$ °C, observation time 300 s. Wavelength range 1200 nm to 1630nm

^[7] Conditions:


- Wavelengths 1550nm \pm 30 nm
- Standard single mode fiber, angled connector min 8°
- With D-shape adapter 81001xx Return Loss > 60 dB typical

^[8] For input power $> + 10$ mW add: add typ. ± 0.0016 dB/mW
In case of negative power change > 50 dB allow additional recovery time of 3 min

^[9] Max 30°C for $> + 20$ dBm input power

High power optical head specifications

All optical heads have to be operated with the single (Agilent 81618A) or dual (Agilent 81619A) Interface Modules.

	Agilent 81628B with integrating sphere
Sensor element	InGaAs
Wavelength range	800 nm to 1700 nm
Power range	-60 dBm to +40 dBm (800 nm to 1700 nm) For operation higher than 34 dBm see safety note 
Damage Power	40.5 dBm
Applicable fiber type	Single mode NA ≤ 0.2, Multimode NA ≤ 0.4
Open beam	∅ ≤ 3mm center of sphere
Uncertainty at reference conditions ^{[1][8]}	± 3.0 % (970 nm to 1630nm)
Total uncertainty ^{[2][8]}	(970 nm to 1630nm)
≤ 10 dBm	± 4.0% ± 5 nW
>10 dBm to ≤20 dBm	± 4.5%
>20 dBm to ≤38 dBm	± 5%
Relative uncertainty: - due to polarization ^[3]	typ. ≤ ± 0.006 dB
- due to speckle noise at source linewidth: ^[4] 0.1pm to 100pm >100pm	typ. ≤ ± 0.02 dB typ. ≤ ± 0.002 dB
Linearity (power): ^{[5][8]}	(CW -40 dBm to + 38 dBm), (970 nm to 1630 nm)
≤ 10 dBm	≤ ± 0.03 dB
>10 dBm to ≤20 dBm	≤ ± 0.06 dB
>20 dBm to ≤37 dBm	≤ ± 0.09 dB
>37 dBm to ≤38 dBm	≤ ± 0.10 dB
	at 23°C ± 5°C, for operating temperature range add ±0.03 dB
Return loss	typ. > 75 dB
Noise (peak to peak) ^[6]	< 5 nW
Averaging time (minimal)	100 μs
Analog Output	Included
Dimensions	55mm x 80 mm x 250 mm
Weight	0.9 kg (without heat sink)
Recommended Recalibration period	2 years
Operating temperature ^[7]	0°C to +40°C
Humidity	Non-condensing
Warm-up time	40 min

^[1] Reference conditions:

- Power level 10 μW (-20 dBm), continuous wave (CW)
- Averaging time 1s
- Parallel beam, 3 mm, center of sphere input
- Ambient temperature 23 °C ± 5 °C
- On day of calibration (add ± 0.3 % for aging over one year, add ± 0.6 % over two years)
- Spectral width of source <10 nm (FWHM)
- Wavelength setting at power sensor must correspond to source wavelength ± 0.4 nm
- Humidity 50 % ± 10 %

^[2] Operating Conditions:

- Parallel beam, ∅ 3mm, center of sphere input, or connectorized fiber with NA ≤ 0.2 (straight connector)
- For NA > 0.2: add 1%
- Within one year after calibration, add ± 0.3% for second year
- Operating temperature range as specified, humidity <80% and non-condensing
- Zeroing required

^[3] All states of polarization at constant wavelength (1550 nm ± 30 nm) and constant power

^[4] Conditions:

- Wavelength 1550 nm ± 30 nm, fixed state of polarization, constant power
- Temperature 23°C ± 5°C
Measurement time ≤ 3 min

^[5] Does not include noise; zeroing required

^[6] Averaging time 1s, T = 23°C ± 5 °C, ΔT ± 1°C, observation time 300 s, wavelength range 970 nm to 1630 nm

Thermal drift at 38 dBm,
exposure time 30 min:
Recovery time 10 min: ≤ 30nW
30 min: ≤ 10nW

^[7] For optical power > 30 dBm the maximal operating temperature is limited to 35°C

^[8] Wavelength must not be equal to any water absorption line



Safety Note:

For optical power higher than 34 dBm the attached heat sink **MUST** be used!

For continuous optical power or average optical power higher than 38 dBm the connector adapters will get warmer than permitted according to the safety standard IEC 61010-1.

The 81628B Optical Head can handle optical power up to 40 dBm, however, operation above 38 dBm is at the operators own risk. Agilent Technologies Deutschland GmbH will not be liable for any damages caused by an operation above 38 dBm.

Return loss module specifications

All modules require angled contact (8°) at input and output connectors

81610A	
Source	external input only ^[1]
Sensor element	InGaAs
Fiber type	Standard single-mode 9 / 125 μm
External input	max input power: 10 dBm min input power: 0 dBm damage input power: 16 dBm
Wavelength range for external input	1250 nm to 1640 nm
Dynamic range	70 dB
Relative uncertainty of ^[2] Return Loss (RL)	with broadband source with Agilent FP sources
RL ≤ 55 dB	< ± 0.25 dB typ. < ± 0.5 dB
RL ≤ 60 dB	< ± 0.3 dB typ. < ± 1.0 dB
RL ≤ 65 dB	< ± 0.65 dB typ. < ± 2.0 dB
RL ≤ 70 dB	< ± 1.7 dB
Total uncertainty	add ± 0.2 dB add typ. ± 0.2 dB
Dimensions (H x W x D)	75 mm x 32 mm x 335 mm (2.8" x 1.3" x 13.2")
Weight	0.6 kg
Recommended Recalibration period	2 years
Operating temperature	10 to 40°C
Humidity	Non-condensing
Warm-up time ^[3]	20 minutes

^[1] Insertion Loss is in the range of 7 dB.

^[2] Averaging time 1 s,
calibration prior to measurement,
constant temperature,
broadband source: Agilent 83438A
FP Sources: Agilent 81650A, 81651A, 81654A with active Coherence Control.
Reference Cable 81610CC used for total uncertainty
Length of measurement patch cord ≤ 2m, angled connector in optimal optical conditions

^[3] Warm-up time 60 min, if previously not stored at the same temperature.

Reference Cable Specification

To connect to Return Loss Modules the cable requires connector Interface 81000SI DIN47256/4108

81610CC Reference cable	
Return loss	as printed on cable
Return loss uncertainty	± 0.2 dB ^[1]
Wavelengths	1310 nm and 1550 nm ± 15 nm

^[1] Clean reference reflector in perfect optical condition
(Do not use with contact-type connectors)

Return loss module specifications with internal source

(When used with external sources the specifications of 81610A return loss module apply)

All modules require angled contact (8°) at input and output connectors

81613A	
Source	Fabry-Perot Laser (internal)
Output Power	typ. -4 dBm ± 1.0 dB typ.
Center wavelength ^[1]	1310 nm / 1550 nm ± 20 nm typ.
Sensor Element	InGaAs
Fiber Type	Standard single-mode 9 / 125 μm
Dynamic Range	75 dB
Relative uncertainty of Return Loss (RL)	User calibration ^[2] Plug and play ^[3]
RL ≤ 55 dB	< ± 0.5 dB (typ. < ± 0.3 dB) typ. < ± 0.6 dB
RL ≤ 60 dB	< ± 0.6 dB (typ. < ± 0.4 dB) typ. < ± 1.5 dB
RL ≤ 65 dB	< ± 0.8 dB (typ. < ± 0.5 dB)
RL ≤ 70 dB	< ± 1.9 dB (typ. < ± 0.8 dB) ^[4]
RL ≤ 75 dB	typ. < ± 2.0 dB ^[4]
Total uncertainty	add ± 0.2 dB add typ. ± 0.2 dB
Dimensions (H x W x D)	75 mm x 32 mm x 335 mm (2.8" x 1.3" x 13.2")
Weight	0.6 kg
Recommended Recalibration period	2 years
Operating temperature	10 to 40°C
Humidity	Non-condensing
Warm-up time ^[5]	20 minutes

^[1] At 25°C constant temperature, coherence control on, warm-up time after laser turn on > 5 min.

^[2] Averaging time 1 s, calibration prior to measurement, constant temperature, coherence control on, warm-up time after laser turn on > 5 min, length of measurement patch cord ≤ 2 m, angled connector in optimal optical condition. Reference cable 81610CC used for total uncertainty.

^[3] Use defaults settings (no user calibration necessary): length of measurement patch cord ≤ 2 m, return loss of connectors ≥ 70 dB.


^[4] For measurements performed immediately after calibration.

^[5] Warm-up time 60 min, if previously not stored at the same temperature.

Laser Safety Information

The above products are classified as Class 1 according to IEC 60825-1 (2001).

All laser sources comply with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated 2001-July-26.

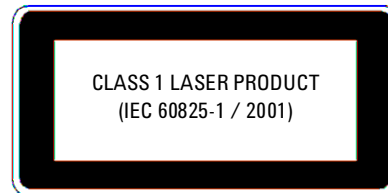

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By Internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:

www.agilent.com/comms/optical

For related literature, please visit:

www.agilent.com/comms/octensors

Phone or Fax

United States:

(tel) 1 800 829 4444
(fax) 1 800 829 4433

Canada:

(tel) 1 877 894 4414
(fax) 1 905 282 6495

Europe:

(tel) +31 20 547 2111
(fax) +31 20 547 2190

Japan:

(tel) 120 421 345
(fax) 120 421 678

Latin America:

(tel) +55 11 4197 3600
(fax) +55 11 4197 3800

Australia:

(tel) 800 629 485
(fax) 800 142 134

Asia Pacific:

(tel) + 852 800 930 871
(fax) + 852 2 506 9233

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2006 Agilent Technologies

February 22, 2006

5988-1569EN



Agilent Technologies